


Woodoc 10 Specification Sheet

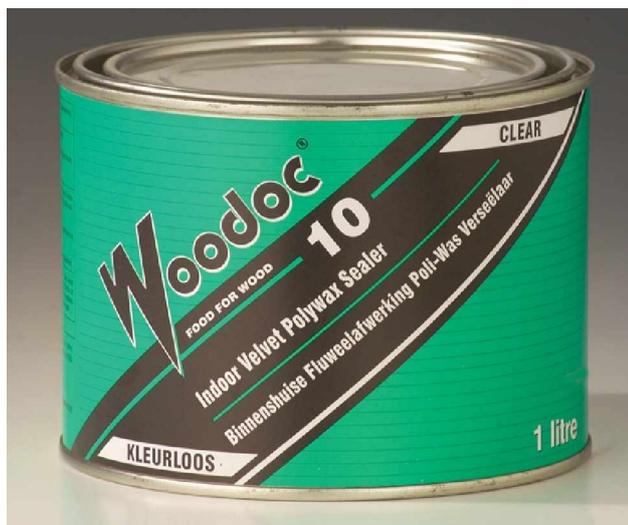

Typical Application:

Woodoc 10 is an indoor, velvet finish (off-gloss) sealer. Apply Woodoc 10 to tabletops, furniture, wooden knife handles, gun and rifle stocks, breadboards, kitchen units, cupboards and sideboards. Woodoc 10 gives a fine finish that is heat, stain and scratch resistant.

Product Features:

Woodoc 10 is one of the most popular Woodoc Wood Finishing Sealers. This sealer applies easily, and the gloss of the sealer may be infinitely varied, using different application techniques, from high gloss through "velvet" or semi-gloss, to absolute matt. This finishing sealer is also compatible for use on woodwork previously treated with oils or waxes. Clean previously oiled or waxed surfaces with Woodoc SteelWool and mineral turpentine before applying Woodoc 10.

- Easy to apply and "fail safe" for all users, from a large factory to the occasional hobbyist.
- Penetrates to form a durable layer of sealed wood that minimizes marring and facilitates easy restoration of damaged surfaces.
- Bubble and flake free.
- Penetrates to become part of the wood.
- Imparts a distinctive deep lustre and patina to all wood surfaces.
- Suitable for all types of wood.
- Non-toxic once dry.
- Does not affect glue.

No: WD10/001

Dated: 20/01/03 **Replacing:** New

Name:

Woodoc 10 - Indoor Velvet Polywax Sealer

Description:

Smooth natural finish

Coverage:

First coat 10-12m²/litre. Subsequent coats 12-14m²/litre. 3 coats (average) 3,3m²/litre.

Application:

Preferably by brush. Spray for final coats if required. Clean brush and spray equipment with mineral turpentine.

Dilution:

Not recommended.

Drying Time:

Sand: 3 - 6 hours.

Hard: 6 - 12 hours.

Drying will vary, depending on moisture and atmospheric conditions.

Product Properties:

Clear, lead-free indoor wood sealer, with non-toxic preservative and anti-fungal properties. Formaldehyde free.

Wax Content:

Low.

Compatibility:

Mineral Turpentine.

Non Compatibility:

Acetone, Lacquer Thinners, Benzene and other solvents.

Packaging:

500 ml, 1 litre and 5 litres.

ALWAYS READ THE DIRECTIONS ON THE TIN BEFORE STARTING WORK.

FLAMMABLE. Keep out of the reach of children. Harmful when consumed. Ingestion may cause chemical pneumonitis.

IMPORTANT: This product hardens through contact with air (oxygen). Replace lid firmly after use to prolong pot life.



Manufactured and marketed by:

Rekara Mills (Pty) Ltd

PO Box 16, Fort Beaufort 5720, South Africa

Tel +2746 645 1109 Fax +2746 645 1538

Customer Service:

Toll free during office hours 0800 411 200 (South Africa only)

Email: information@woodoc.com or visit www.woodoc.com